



800-W WALL TYPE INDICATOR POST



UL/FM


FIRE PROTECTION PRODUCTS

MATERIALS LIST

Item	Description	Material	Specification
1	Body	Cast Iron	ASTM A126-B
2	Hand Wheel	Cast Iron	ASTM A126-B
3	Operating Stem	Cast Bronze	ASTM B-62
4	Target Frame	Cast Bronze	ASTM B-62
5	Retaining Ring	Steel	SAE1065-1090
6	Extension Rod	Mild Steel	ASTM A105-80
7	Socket	Cast Iron	ASTM A126-B
8	Gasket	Rubber	Commercial
9	Washer	Steel	Commerccail
10	Cotter Pin	Brass	ASTM B-16
11	Nut	Steel	ASTM A307-B
12	Bolt	Steel	ASTM A307-B
13	Sign Plate	Aluminum	Commercial
14	Cap	Cast Iron	ASTM A126-B
15	Window Glass	Pleiglass	Commercial
16	Window Frame	Cast Bronze	ASTM B-62
17	Fixed Plate	Steel	Commercial



Fig No: 800W

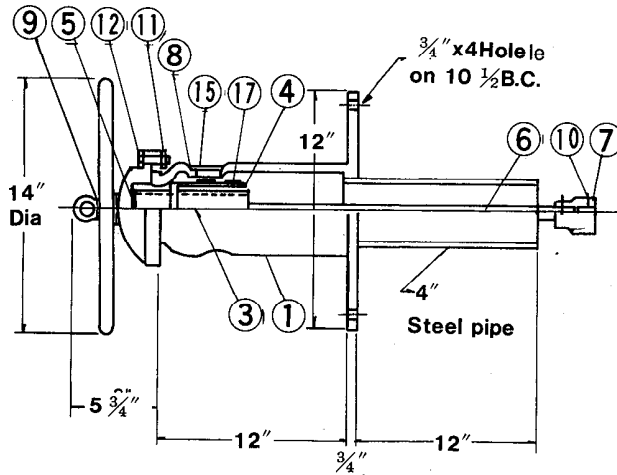

DIMENSION—WEIGHTS

Nominal Size	Dimensions in Inches		Ext. Rod Length	Approx Net.Wt. (Lbs)
	A	B		
4"	9.56	13.63	3'	90 (All Sizes)
6"	13.69	18.00	3'	
8"	16.50	21.00	3'	
10"	19.88	24.63	3'	
12"	23.50	28.25	3'	

NOTE:

1. Used for applications where a valve is installed behind a wall.
2. The wall flange of the wall type Indicator Post is tapped for 4" schedule 40 steel pipe (furnished by customer) which extends through the wall.
3. Handwheel operation.

